



# Soft P25 LED Mesh Screen


Technical Specification&Images

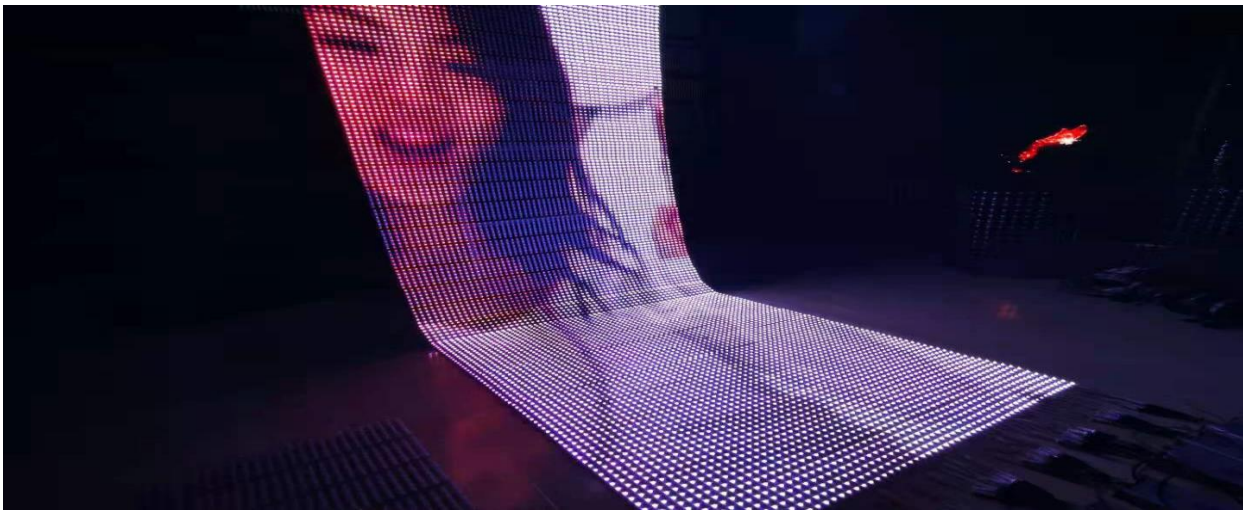

Model	P25 Soft Mesh	
Application		Outdoor
LEDs/Pixel	SMD	SMD3535*1
Pixel Density	Pixel/M <sup>2</sup>	1600
Horizontal pitch	mm	25mm
Vertical pitch	mm	25mm
Grayscale	bit	12bit (4096)
Brightness	nits	6200
Contrast	/	1:2000
Horizontal viewing angle		130°
Vertical viewing angle		130°
Scan		Static
Maximum power consumption	w/m <sup>2</sup>	130 W
Average power consumption	w/m <sup>2</sup>	400 W
Unit weight	kg/m <sup>2</sup>	5.8 kg
Refresh frequency	Hz	3840 HZ
Power supply voltage	DC/ V	DC12/15V
Life span	H	≥80000H
Transparency	%	45%
Ingress protection	IP	IP67
Housing&Base Material		PC
Housing Color		Transparent/Black

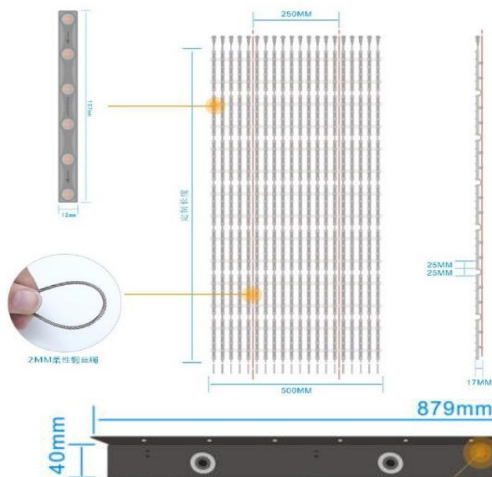

*\*All hardware and software included.*

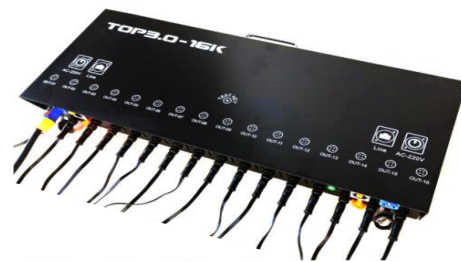


PSU+ 16 Channel Novastar Data Distribution Box  
Please confirm local voltage before order

Top&Bottom Fixture



# Soft P25 LED Mesh Screen


Novastar Control and Display System

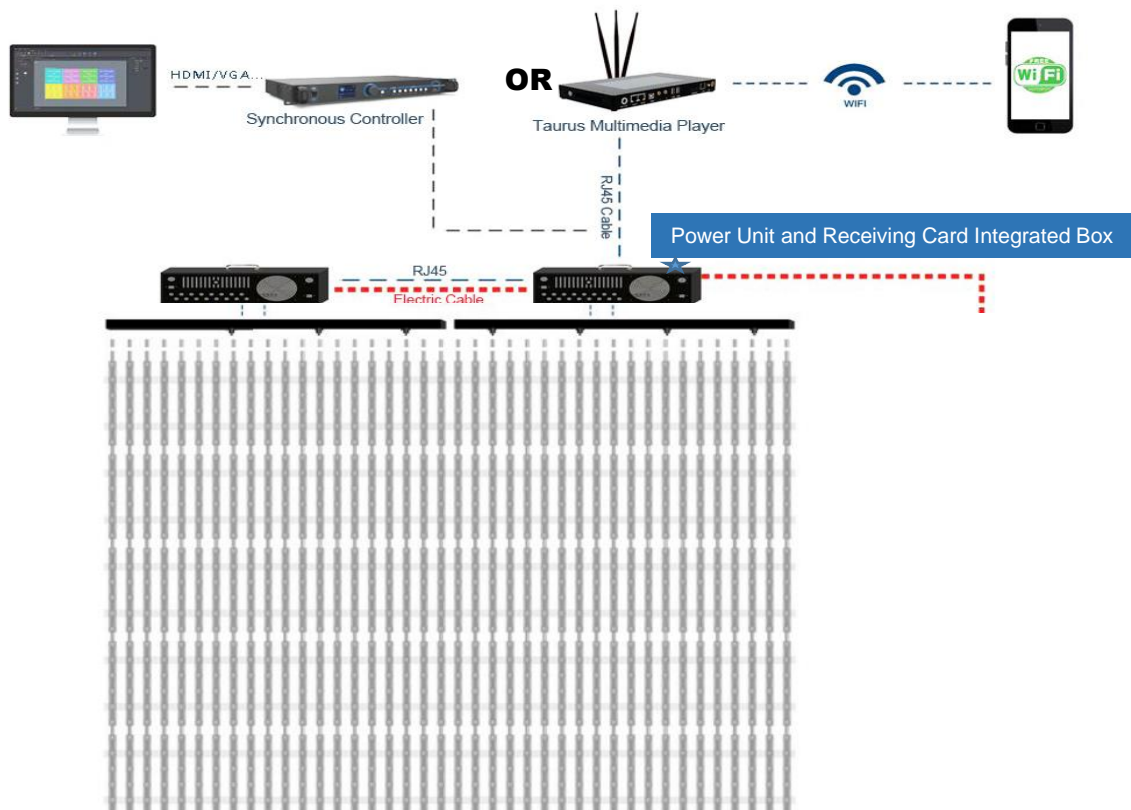



# Soft P25 LED Mesh Screen

The Fixture System

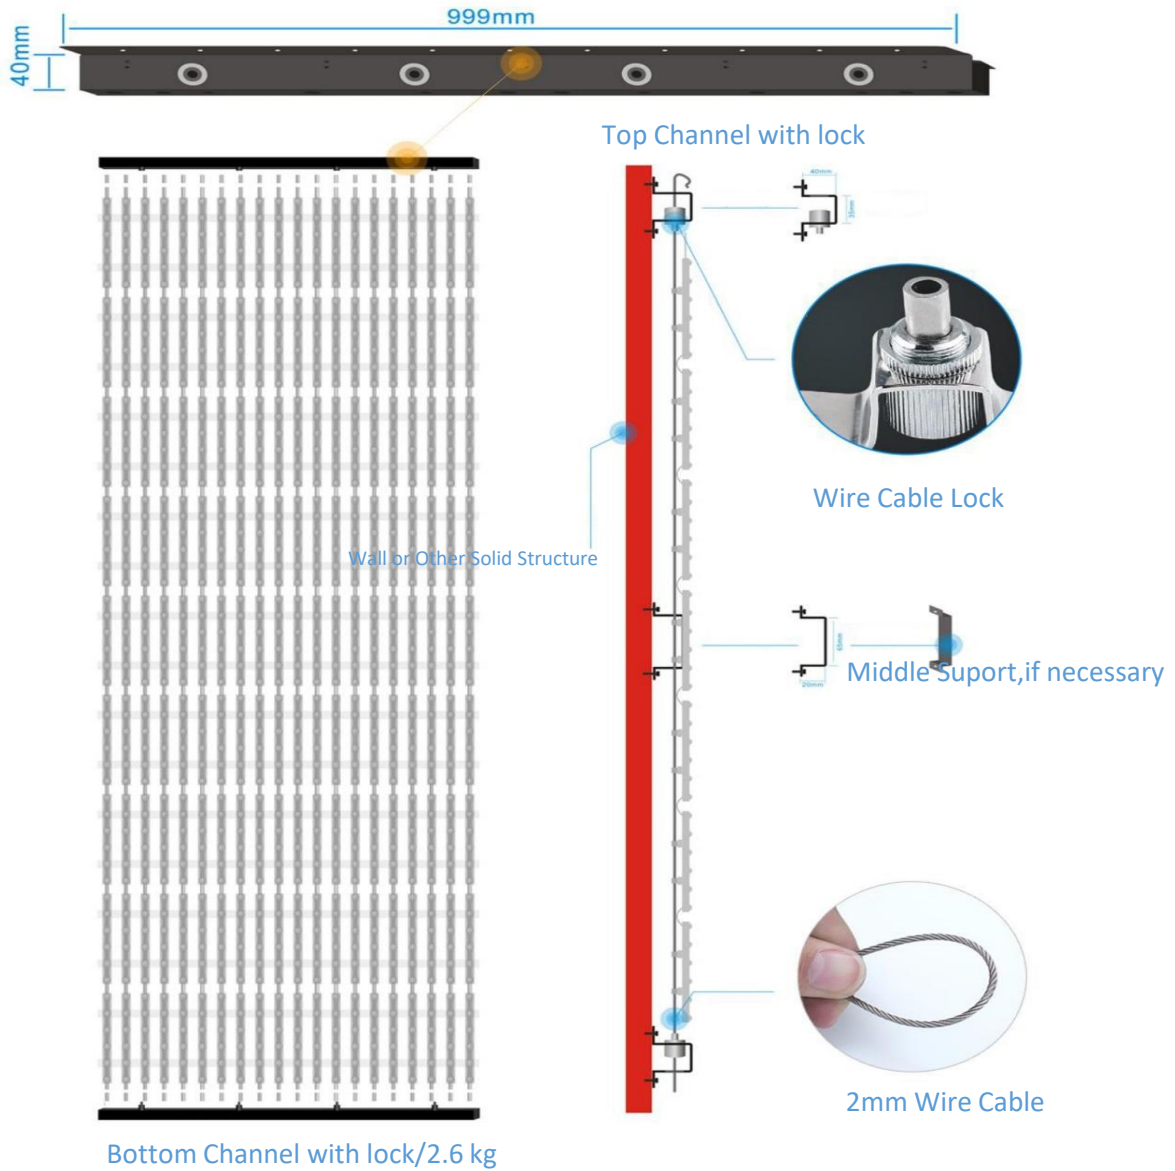

## Integrated PSU and Scan Box



Model	Loading Capacity	Dimension	Weight
TOP3.0-16CH-12V-800W	P55 0.88x4m(w*h)	670*270*85 mm	7.5 KG
TOP3.0-16CH-12V-1600W	P55 0.88x 8m(w*h)	670*270*85 mm	8.6 KG
TOP3.0-16CH-12V-3200W	P55 0.88x16m(w*h)	670*270*135 mm	13.5 KG