





Soft P25 LED Mesh Screen


Technical Specification&Images

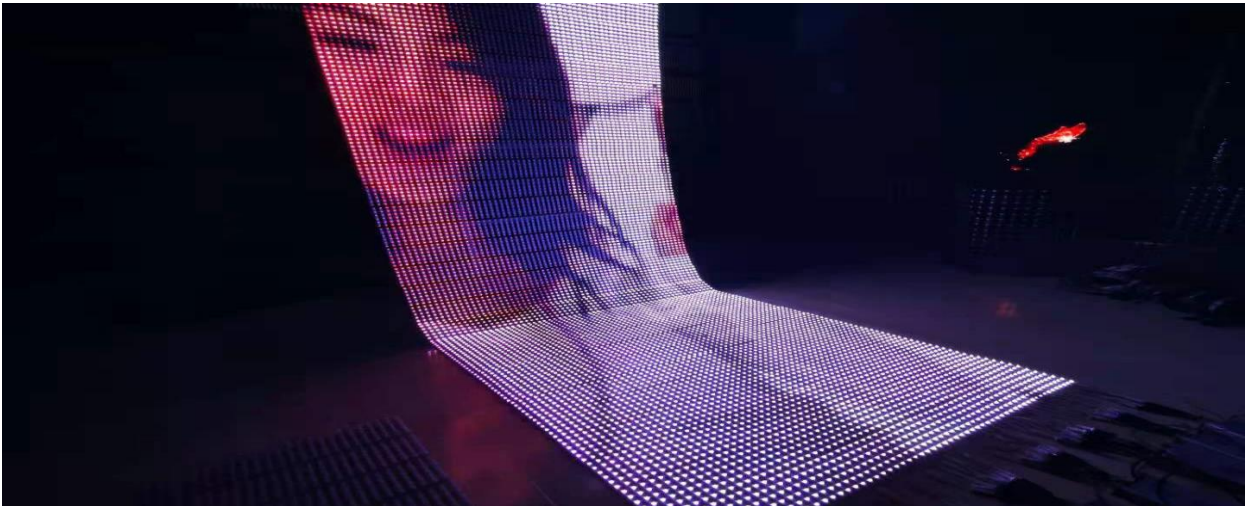

Price/M ²		\$243	\$272	\$296
Model	P25 Soft Mesh			
Application		Outdoor		
LEDs/Pixel	SMD	SMD3535*1		
Pixel Density	Pixel/M ²	1600		
Horizontal pitch	mm	25mm		
Vertical pitch	mm	25mm		
Grayscale	bit	12bit (4096)		
Brightness	nits	6200		
Contrast	/	1:2000		
Horizontal viewing angle		130°		
Vertical viewing angle		130°		
Scan		Static		
Maximum power consumption	w/m ²	130 W		
Average power consumption	w/m ²	400 W		
Unit weight	kg/m ²	5.8 kg		
Refresh frequency	Hz	3840 HZ		
Power supply voltage	DC/ V	DC12/15V		
Life span	H	≥80000H		
Transparency	%	45%		
Ingress protection	IP	IP67		
Housing&Base Material		PC		
Housing Color		Transparent/Black		

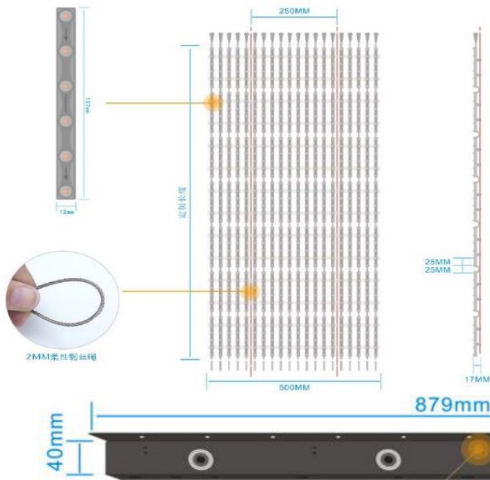

*All hardware and software included.

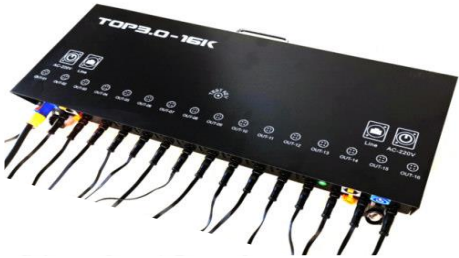

PSU+ 16 Channel Novastar Data Distribution Box
Please confirm local vottage before order


Top&Bottom Fixture



Version 2021.02

Soft P25 LED Mesh Screen


Control and Display System

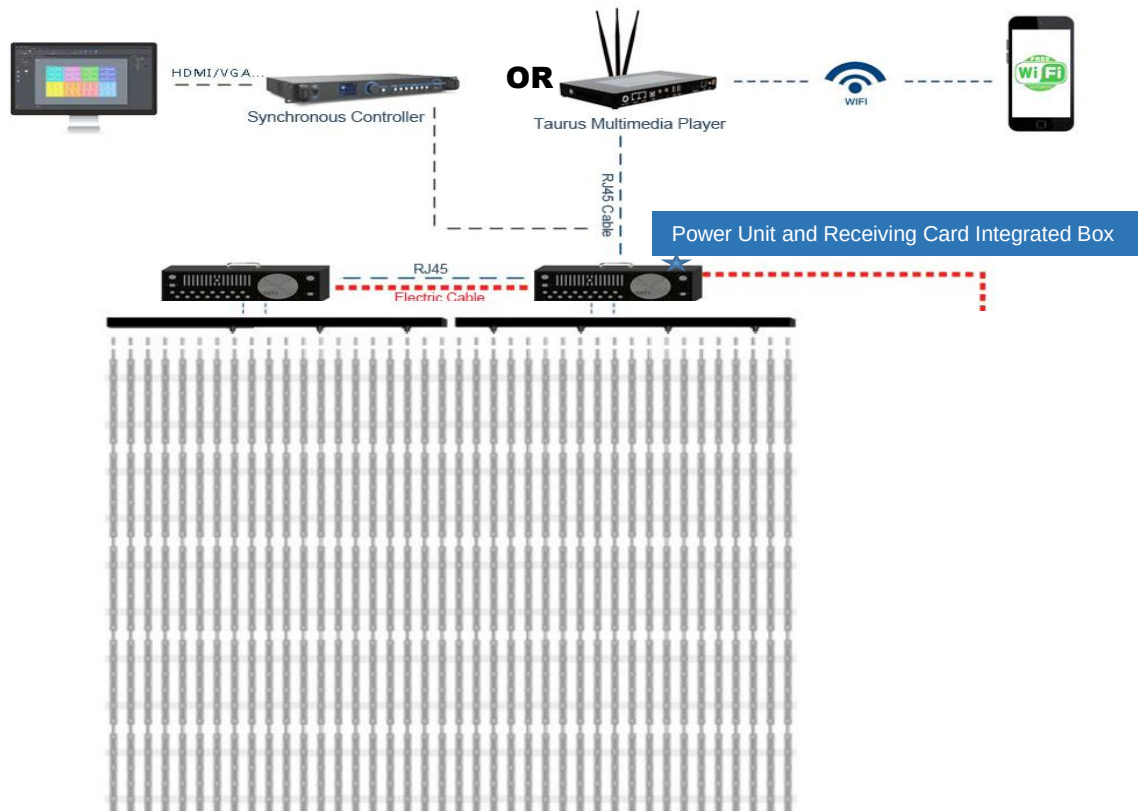



Soft P25 LED Mesh Screen

The Fixture System

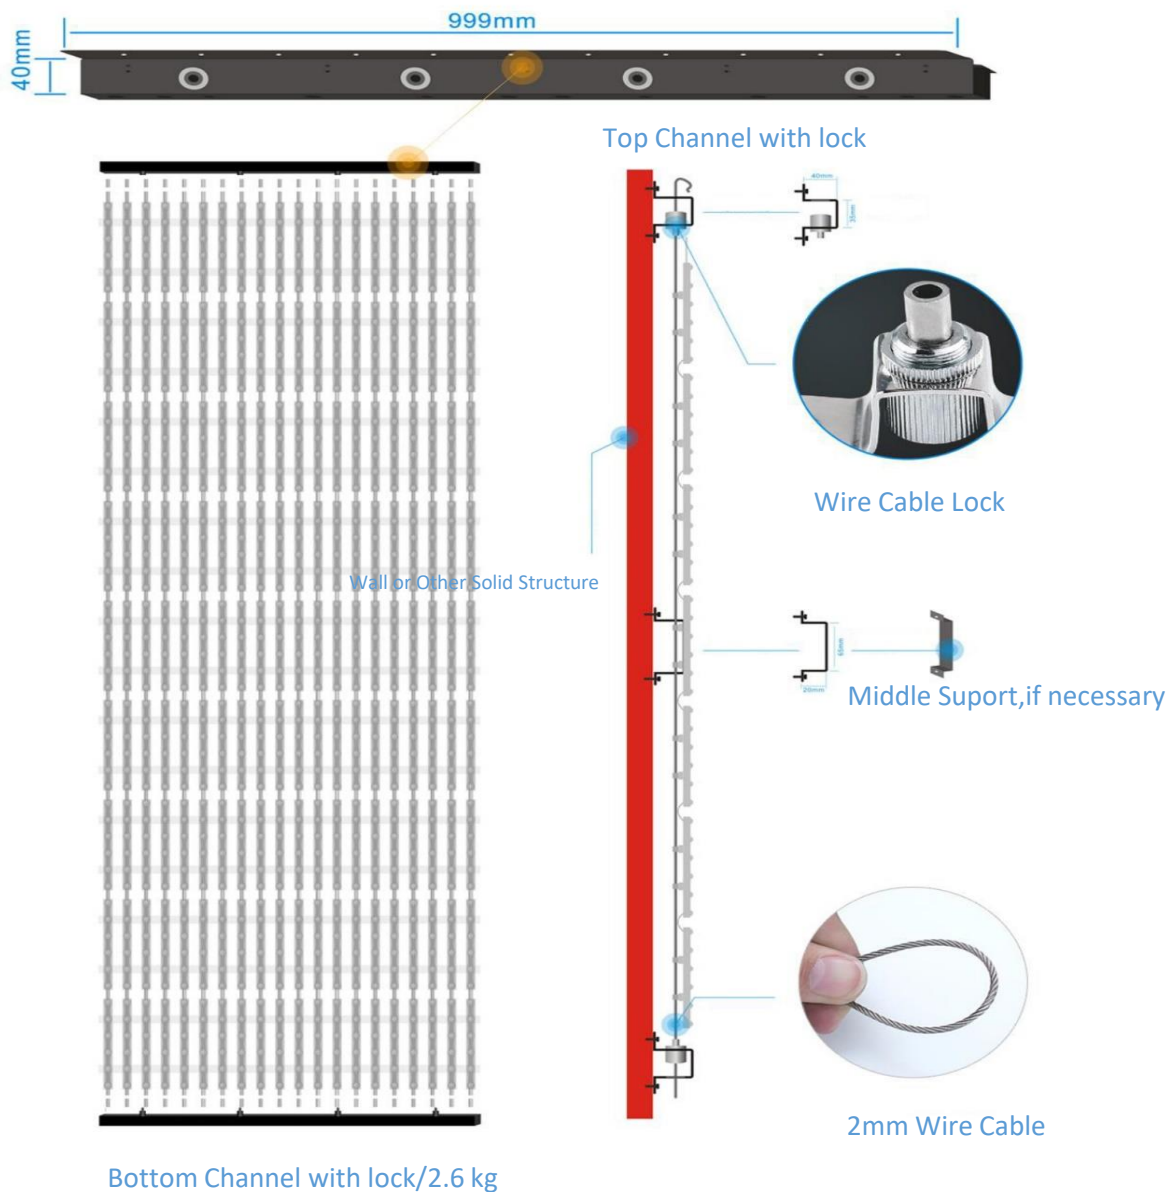

Integrated PSU and Scan Box



Model	Loading Capacity	Dimension	Weight
TOP3.0-16CH-12V-800W	P55 0.88x4m(w*h)	670*270*85 mm	7.5 KG
TOP3.0-16CH-12V-1600W	P55 0.88x 8m(w*h)	670*270*85 mm	8.6 KG
TOP3.0-16CH-12V-3200W	P55 0.88x16m(w*h)	670*270*135 mm	13.5 KG