


P31.16 LED Mesh Cabinet



| Model | H3116s | | |
|------------------------|------------------------|------------------------|------------------------|
| LED Type | DIP 346 (1R1G1B) | Pixel per m2 | 32x60 PX |
| Pixel Pitch(H*V) | 31.25*16.5 mm | Cabinet Size | 1000x1000x120 mm |
| Grayscale | 16 bit (65536) | Brightness | >8500 nits |
| Refresh Frequency | 3840 hz | IC Type | ICN2038s |
| View Angle | H 140° V 110° | Temperature | -40~80℃ |
| Transparency | 60% | Suggest View Distance | ≥ 20-500 m |
| Max. Power Consumption | 500 w/m ² | Avg. Power Consumption | 115 w/m ² |
| Cabinet Material | Aluminum alloy | Connection | signal&power one cable |
| Power Supply | 100-240V | Drive Voltage | 5 v/dc |
| Control System | Novastar | LED Brand | Epistar/Nationstar |
| Unit Weight | 12.5 kg/m ² | Fixing Direction | Vertical |
| Maintance | Front or Rear | Ingress Protection | IP67 |
| Warranty | 3 years | Permissible humidity | 10..90% |

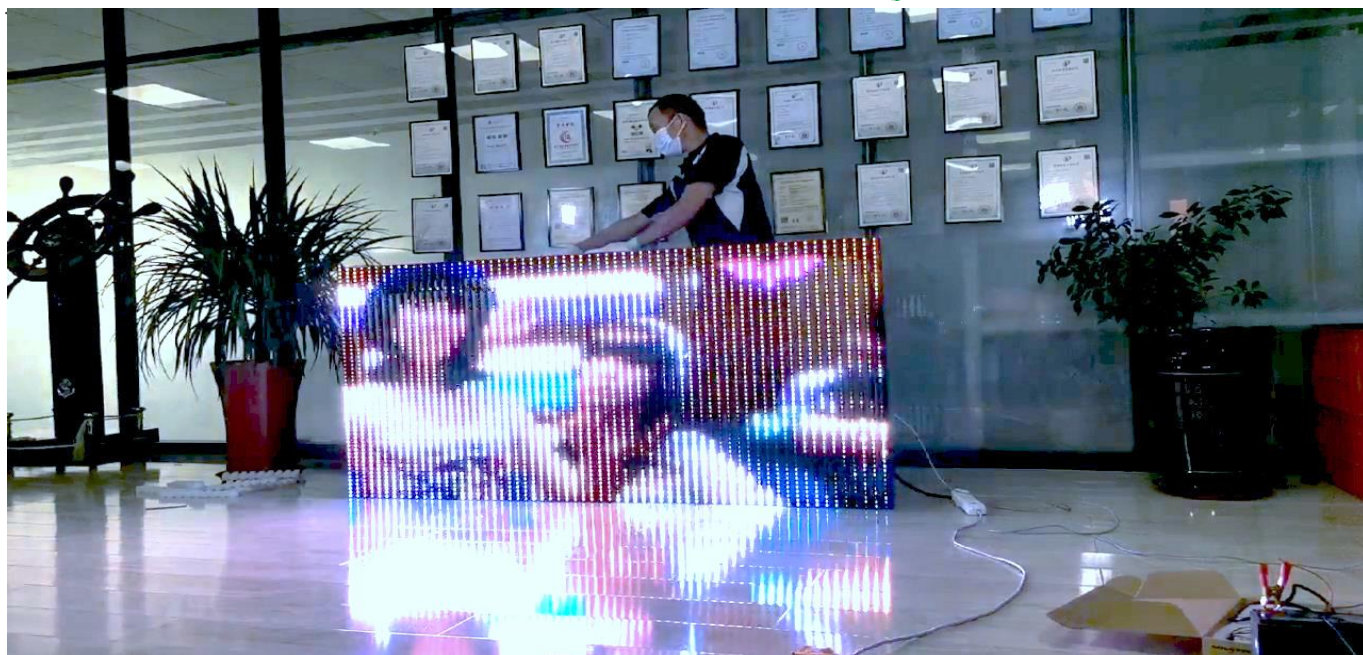

OR

